




Earthing Protection Copper Wire Connectors Crimp Split Bolt

Our Product Introduction

Basic Information

- Place of Origin: china
- Brand Name: jinshunlai
- Certification: ISO, AISI, ASTM, GB, EN, DIN
- Model Number: 0.1mm-900mm
- Minimum Order Quantity: 1kg
- Price: Contact Us
- Packaging Details: Waterproof Paper, Steel Strip Packed and other Standard Export Seaworthy Package, or customized package
- Delivery Time: 5day
- Payment Terms: L/C, T/T , Western Union
- Supply Ability: 90000ton

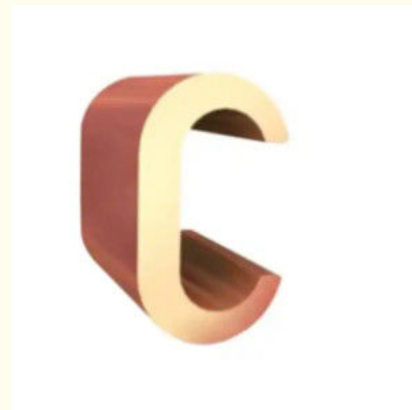

Product Specification

- Chemical Composition: Cu-Ni
- Corrosion Resistance: Excellent
- Density: 8.9 G/cm3
- Elongation: 30-40%
- Machinability: Good
- Yield Strength: 200-350 MPa
- Highlight: Earthing copper wire connectors, copper wire connectors Crimp, Earthing split bolt wire connector

for more products please visit us on copper-solid.com


Product Description

Earthing & Lighting Protection Wholesale Supply Copper Crim Connector

Other attributes

Place of Origin	Jiangsu, China
Brand Name	jinshunlai
Model Number	PWR
Material	T2
Thickness	3-50mm
Welding	10-200mm
OEM	Accepted
Purity	99.9%
Type	Copper foil connector
copper foil	120*0.2M
Name	High Quality Flexible Laminated Copper Shunt

Packaging & delivery

Package Type:	3000a flexible laminated copper busbar Plastic bags ,blister card ,standard export cartons 
---------------	--

Supply Ability

Supply Ability	1000 Piece/Pieces per Week
----------------	----------------------------

Product details

Product Description

laminated copper foil connector is an excellent electrical conductor, the laminated copper foil connectors are normally used in **new-energy vehicles, switchgear industries, power plants, cathodic protection, bus ducts, transformer, vacuum circuit breaker, resistance welding engineering, electric locomotives and furnaces, etc.**

Detailed Images



Wuxi Jinnuo copper Co.,Ltd



+86-17763564398



sales01@shuangheyisteel.com



copper-solid.com

32 Chengnan Road, New District, Wuxi City, Jiangsu Province, China

